

# GAS ANALYSER OXYBABY® P

for O<sub>2</sub>, CO<sub>2</sub> or CO<sub>2</sub>/O<sub>2</sub>



## Cordless hand held analyser for checking pressure lines especially in welding technology.

OXYBABY® P from WITT is based optionally on M+ or 6.0 version and the ideal instrument for portable, faster and accurate tests at gases in a pressurized supply line.

The composition of the gas mixture can be checked with OXYBABY® P at each point of the gas line and directly at the consumption point.

The measuring starts and the result is shown in the illuminated display.

Not only the kind of gas also the concentration can be checked.

Easy operation by intuitive operational concept.

Logging of the last measurements for documentation and export (only 6.0 version).


The 6.0 version offers all benefits of modern technology quickly and easily by option. For example: Bluetooth for wireless communication and an integrated barcode reader.

### Benefits

- integrated data log of the last measurements
- cordless operation using rechargeable batteries
- sample flow control with warning
- upgraded simple one hand operation
- easy to clean
- large illuminated graphic display
- multilingual menu guide
- data transfer (only 6.0 version) and charge of batteries via USB port
- administration up to 25 users, 100 applications and 50 allocations (only 6.0 version)
- long lifetime of O<sub>2</sub> sensor (approx. 2 years)
- low maintenance costs

### Complete in carrying case

- charging device
- CD-ROM with:
  - operating instructions
  - OBCC-Software demo-version (only 6.0 version)
- connection G 1/4 M with union nut
- case dimensions (HxWxD): approx. 325x385x115 mm  
case weight: approx. 1.7 kg

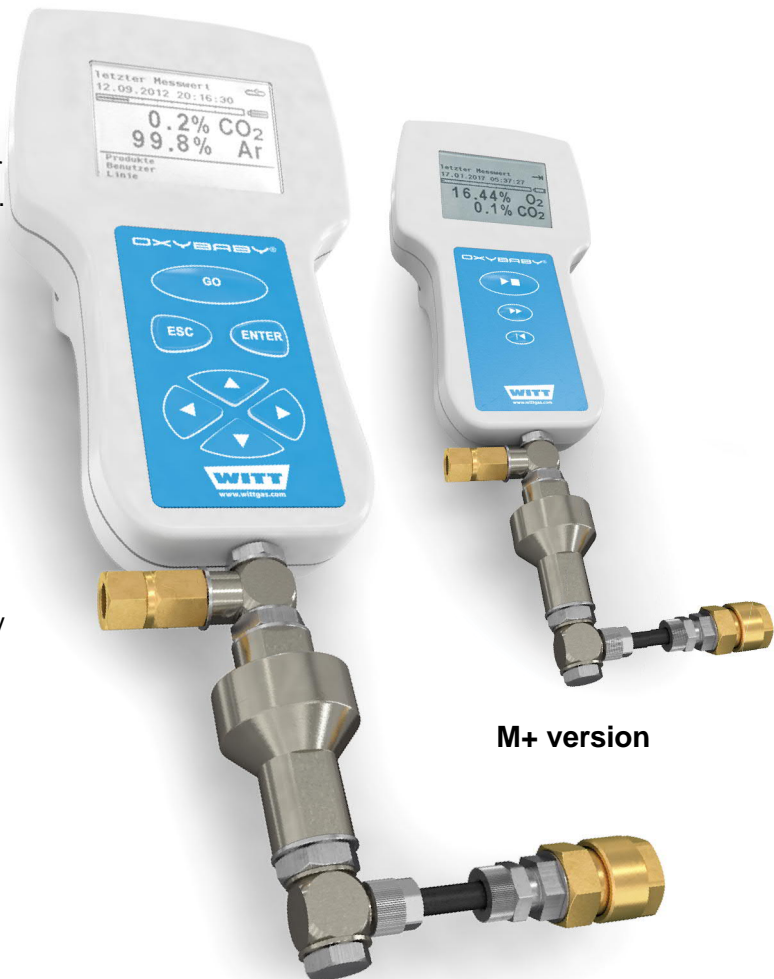

M+ version

6.0 version



further information on  
[www.oxybaby.com](http://www.oxybaby.com)

► Video

### Options

- adapter for various connections
- only at standard 6.0 version
  - data cable
  - Bluetooth (e.g. for separate printer)

# GAS ANALYSER OXYBABY® P

for O<sub>2</sub>, CO<sub>2</sub> or CO<sub>2</sub>/O<sub>2</sub>



standard version M+ 6.0	OXYBABY® P O <sub>2</sub>	OXYBABY® P CO <sub>2</sub>	OXYBABY® P CO <sub>2</sub> /O <sub>2</sub>	
<ul style="list-style-type: none"> <li>• <b>Gases</b></li> </ul>	O <sub>2</sub> balance gas: N <sub>2</sub> (or others on request)	CO <sub>2</sub> balance gas: Ar (or others on request)	CO <sub>2</sub> and O <sub>2</sub> balance gas: Ar (or others on request)	
<ul style="list-style-type: none"> <li>• <b>Measuring principle</b></li> </ul>	electrochemical cell	IR-absorption	IR-absorption	electrochemical cell
<ul style="list-style-type: none"> <li>• <b>Sensor lifetime</b></li> </ul>	approx. 2 years (in air at 20 °C / 68 °F)	long lifetime	long lifetime	approx. 2 years (in air at 20 °C / 68 °F)
<ul style="list-style-type: none"> <li>• <b>Measuring range</b></li> </ul>	0 – 100%			
<ul style="list-style-type: none"> <li>•</li> </ul>	O <sub>2</sub> in 0.01%-steps	CO <sub>2</sub> in 0.1%-steps	O <sub>2</sub> in 0.01%-steps	CO <sub>2</sub> in 0.1%-steps
<ul style="list-style-type: none"> <li>• <b>Pressure range</b></li> </ul>	1 – 10 barg			
<ul style="list-style-type: none"> <li>• <b>Sample gas requirement and Sample time</b></li> </ul>	dependent on inlet pressure and hose-volume max. 10 sec.			
<ul style="list-style-type: none"> <li>• <b>Response time</b></li> </ul>	4 sec.			
<ul style="list-style-type: none"> <li>• <b>Calibration</b></li> </ul>	simple two point calibration			
<ul style="list-style-type: none"> <li>• <b>Data log</b></li> </ul>	last 100 measurements			
<ul style="list-style-type: none"> <li>•</li> </ul>	last 500 measurements			
<ul style="list-style-type: none"> <li>•</li> </ul>	assignment of measurements to different product names			
<ul style="list-style-type: none"> <li>•</li> </ul>	administration up to 25 users, 100 applications and 50 allocations			
<ul style="list-style-type: none"> <li>•</li> </ul>	interface for transfer of logged data			
<ul style="list-style-type: none"> <li>• <b>Communication</b></li> </ul>	USB port, microSD card			
<ul style="list-style-type: none"> <li>• <b>Software</b></li> </ul>	OBCC			
<ul style="list-style-type: none"> <li>• <b>Multilingual</b></li> </ul>	German, English, French, Italian, Dutch, Swedish, Finnish, Spanish, Polish, Japanese, Russian, Turkish and Hungarian (more to follow)			
<ul style="list-style-type: none"> <li>• <b>Temperature (gas/environment)</b></li> </ul>	0 – 40 °C (32 – 104 °F)			
<ul style="list-style-type: none"> <li>• <b>Display</b></li> </ul>	backlit			
<ul style="list-style-type: none"> <li>• <b>Shut down</b></li> </ul>	automatic after 2 minutes of non-use			
<ul style="list-style-type: none"> <li>• <b>Housing</b></li> </ul>	shock resistant plastic, IP 54			
<ul style="list-style-type: none"> <li>• <b>Weight</b></li> </ul>	approx. 580 g (without accessories)			
<ul style="list-style-type: none"> <li>• <b>Dimensions (HxWxD)</b></li> </ul>	187 x 106 x 91 mm (7.36 x 4.17 x 3.58 inch)			
<ul style="list-style-type: none"> <li>• <b>Power supply</b></li> </ul>	3 integrated rechargeable batteries, type Ni-MH (charging device included)			
<ul style="list-style-type: none"> <li>• <b>Charging device</b></li> </ul>	110 – 240 V AC			
<ul style="list-style-type: none"> <li>• <b>Approvals</b></li> </ul>	Company certified according to ISO 9001 CE-marked according to: - EMC 2014/30/EU - Low Voltage Directive 2014/35/EU			


Windows-Software for the documentation of analysis-results of OXYBABY® 6.0, OXYBABY® P 6.0, OXYBABY® Med und PA 7.0.

You can find a demo version of WITT analysis software includes with your OXYBABY® respectively PA. In case of acquisition the unlock key you can use the OBCC for documentation your measured results. So you can offer your customers a complete documentation of your quality control and guaranteed continued customer satisfaction.



### Benefits

- quality control by means of data recording and storing with date and time
- individual product administration of article no., lot no., product name, test data and also examiner
- data-export interface for further read-out of the measured data in MS EXCEL®
- multilingual interface
- administration of product names
- options of choice:
  - user
  - products
  - lines
  - measurements

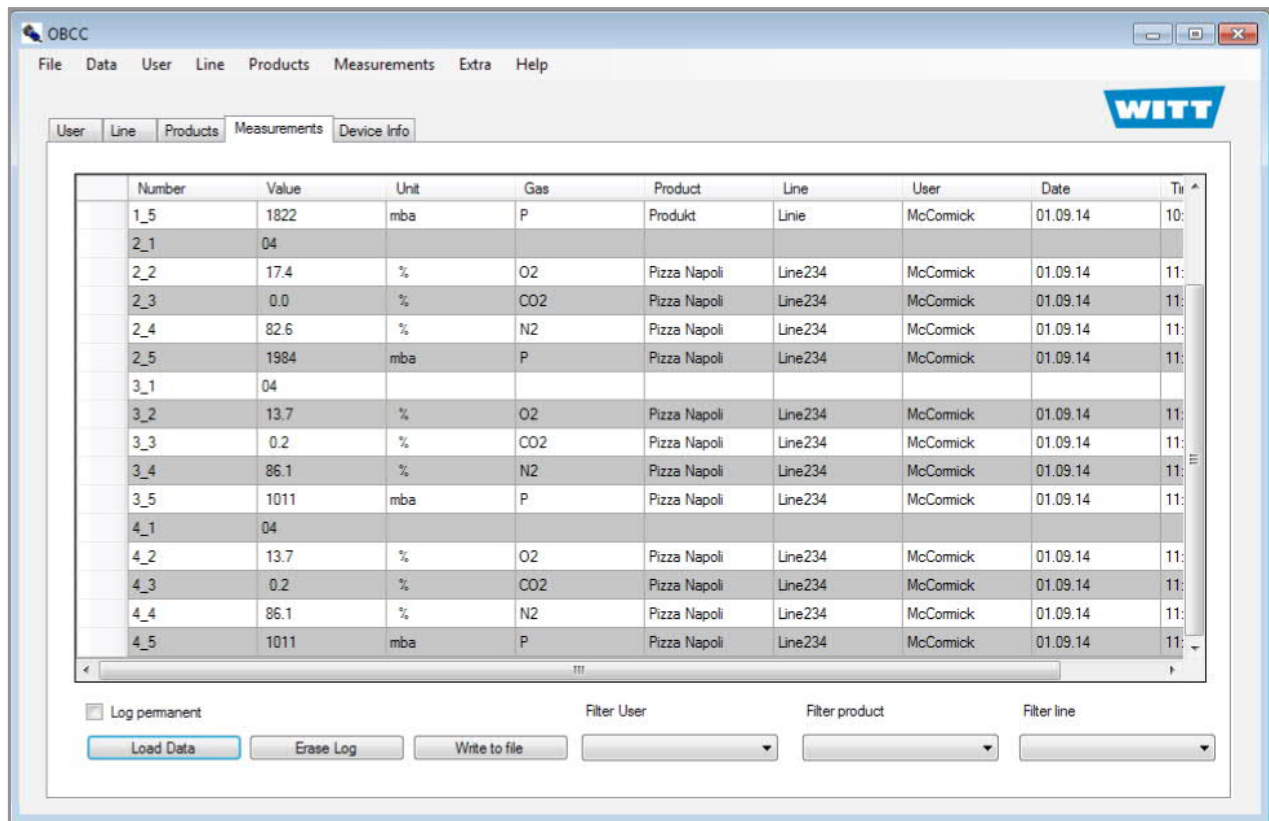

Number	Value	Unit	Gas	Product	Line	User	Date	Tr
1_5	1822	mba	P	Produkt	Linie	McCormick	01.09.14	10:
2_1	04							
2_2	17.4	%	O2	Pizza Napoli	Line234	McCormick	01.09.14	11:
2_3	0.0	%	CO2	Pizza Napoli	Line234	McCormick	01.09.14	11:
2_4	82.6	%	N2	Pizza Napoli	Line234	McCormick	01.09.14	11:
2_5	1984	mba	P	Pizza Napoli	Line234	McCormick	01.09.14	11:
3_1	04							
3_2	13.7	%	O2	Pizza Napoli	Line234	McCormick	01.09.14	11:
3_3	0.2	%	CO2	Pizza Napoli	Line234	McCormick	01.09.14	11:
3_4	86.1	%	N2	Pizza Napoli	Line234	McCormick	01.09.14	11:
3_5	1011	mba	P	Pizza Napoli	Line234	McCormick	01.09.14	11:
4_1	04							
4_2	13.7	%	O2	Pizza Napoli	Line234	McCormick	01.09.14	11:
4_3	0.2	%	CO2	Pizza Napoli	Line234	McCormick	01.09.14	11:
4_4	86.1	%	N2	Pizza Napoli	Line234	McCormick	01.09.14	11:
4_5	1011	mba	P	Pizza Napoli	Line234	McCormick	01.09.14	11:

### System requirements

<b>Operating system</b>	WINDOWS® XP, 7 or above
<b>Hardware</b>	1 free USB interface, graphic resolution min. 1024 x 768 Pixel
<b>Software</b>	Microsoft.NET Framework, min. Version 2.0 OXYBABY® 6.0 USB driver
<b>Compatibility</b>	OXYBABY® 6.0, OXYBABY® P 6.0, OXYBABY® Med, PA 7.0, – please specify device number with order –
<b>Accessories</b>	USB connecting cable included in delivery