


FLASHBACK ARRESTORS

stainless steel - ES



F53N-ES
F53N/H-ES
RF53N-ES
RF53N/H-ES

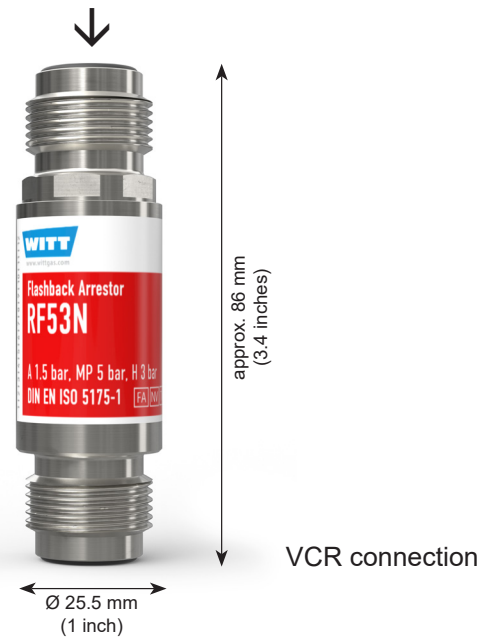

WITT Flashback Arrestors for reliable protection against dangerous reverse gas flow and flashbacks according to DIN EN ISO 5175-1. Every Arrestor 100% tested.

The best Flashback Arrestors in the world

Benefits

- a large surface area flame arrestor [FA] of stainless steel construction extinguishes any dangerous flashback
- a temperature sensitive cut-off valve [TV] extinguishes sustained flashbacks long before the internal temperature of the arrestors reaches a dangerous level
- a spring loaded non-return valve [NV] prevents slow or sudden reverse gas flow forming explosive mixtures in the gas supply
- a filter at the gas inlet protects the arrestor against dirt contamination, extending the service life (RF53N-ES)

Operation / Usage

- Flashback Arrestors are used to protect gas cylinders and pipeline outlet points (hoses and any equipment) against dangerous reverse gas flow (RF53N-ES) and flashbacks
- without non-return valve (F53N-ES) for lower working pressures i.e. before and after analysers
- ideal for use with corrosive gases in the chemical industry, process technology or in the laboratory area
- WITT Flashback Arrestors may be mounted in any position / orientation
- the maximum ambient/working temperature is 60 °C / 140 °F

Maintenance

- annual testing of the non-return valve, body leak tightness and flow capacity is recommended
- WITT is happy to supply special test equipment
- Flashback Arrestors are only to be serviced by the manufacturer. The dirt filter may be replaced by competent staff

Approvals

Company certified according to ISO 9001
 Designed for Oxygen Service in accordance with EIGA 13/20 and CGA G-4.4: Oxygen Pipeline and Piping Systems
 Cleaned for Oxygen Service in accordance with EIGA 33/18 and CGA G-4.1: Cleaning of Equipment for Oxygen Service
 Other connections available upon request

Safety device	Model ...-ES			
	F53N	F53N/H	RF53N	RF53N/H
Flame arrestor [FA]	✓		✓	
Non-return valve [NV]	–		✓	
Temperature sensitive cut-off valve [TV]	✓		✓	
Weight [g]	181		195	
Gases	max. working pressure [bar]			
Acetylene (A)	1.5	–	1.5	–
Natural gas (M)	5.0	12.0	5.0	12.0
LPG (P)	5.0	8.0	5.0	8.0
Hydrogen (H)	3.0	10.0	3.0	10.0
Ethylene (E)	–	9.0	–	9.0
Oxygen (O)	25.0	–	25.0	–
Compressed air (D)	25.0	–	25.0	–
Connections	Order-No.			
1/4" NPT F	145-227	145-106	145-262	145-107
3/8" NPT F	–	–	145-024	145-121
Material	Housing – 1.4305/303/SUS303; Flame arrestor – 1.4404/316L/SUS316L; Seal – Elastomer			
7/8"-14UNF VCR	–	–	145-142	–
Material	Housing – 1.4404/316L/SUS316L; Flame arrestor – 1.4404/316L/SUS316L; Seal – Elastomer			

Note: The Models RF53N-ES and F53N-ES are suitable for fuel gas and oxygen.

FLASHBACK ARRESTORS

stainless steel - ES




RF53N-ES

145-262
145-024
145-142

Conversion factors:

Acetylene	x 1.04
Butane	x 0.68
Natural gas	x 1.25
Methane	x 1.33
Propane	x 0.80
Oxygen	x 0.95
Town gas	x 1.54
Hydrogen	x 3.75

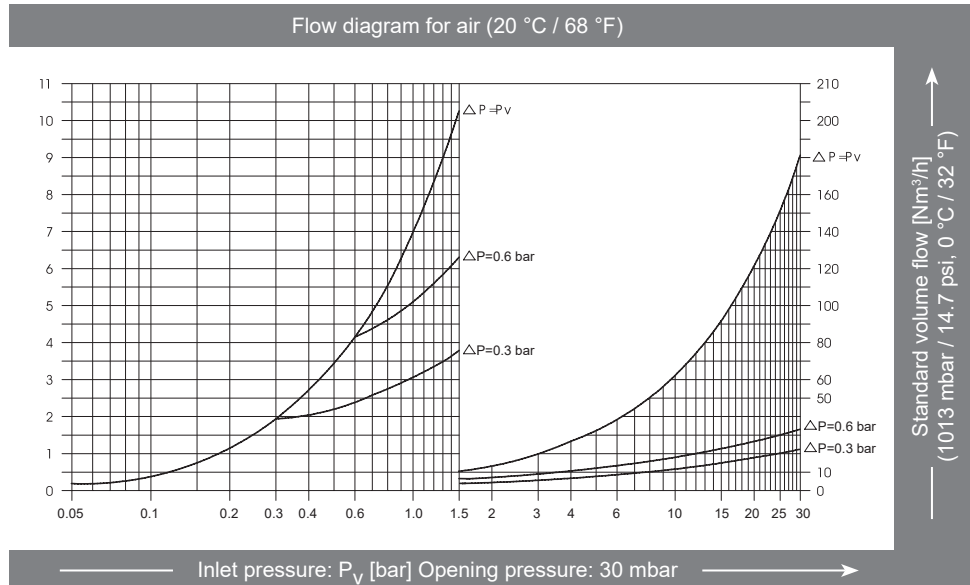


F53N-ES

145-227

Conversion factors:

Acetylene	x 1.04
Butane	x 0.68
Natural gas	x 1.25
Methane	x 1.33
Propane	x 0.80
Oxygen	x 0.95
Town gas	x 1.54
Hydrogen	x 3.75

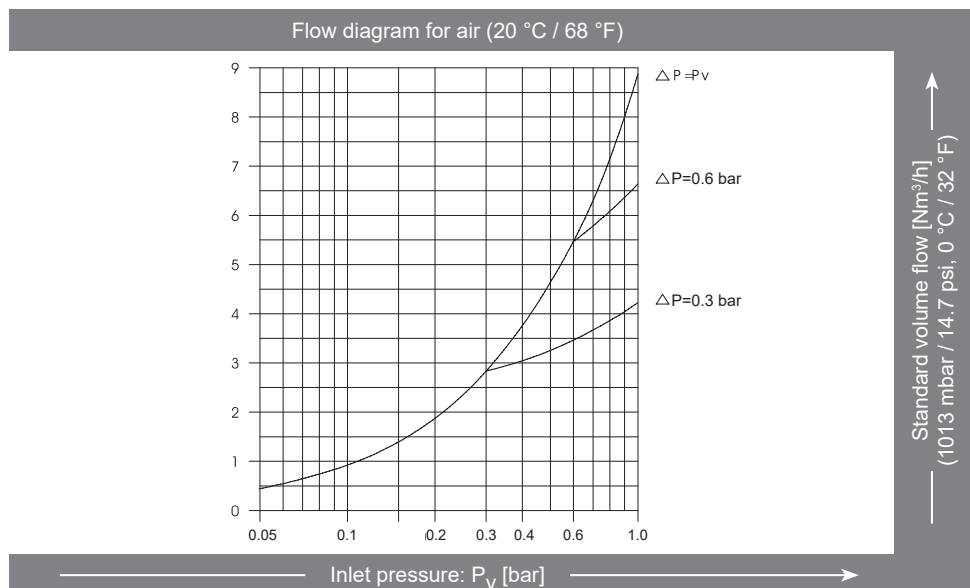

RF53N/H-ES

145-107
145-121

Conversion factors:

Acetylene	x 1.04
Butane	x 0.68
Natural gas	x 1.25
Methane	x 1.33
Propane	x 0.80
Oxygen	x 0.95
Town gas	x 1.54
Hydrogen	x 3.75

