


# LANCE HOLDER LK

for oxygen lances 6 mm – 1.1/4"

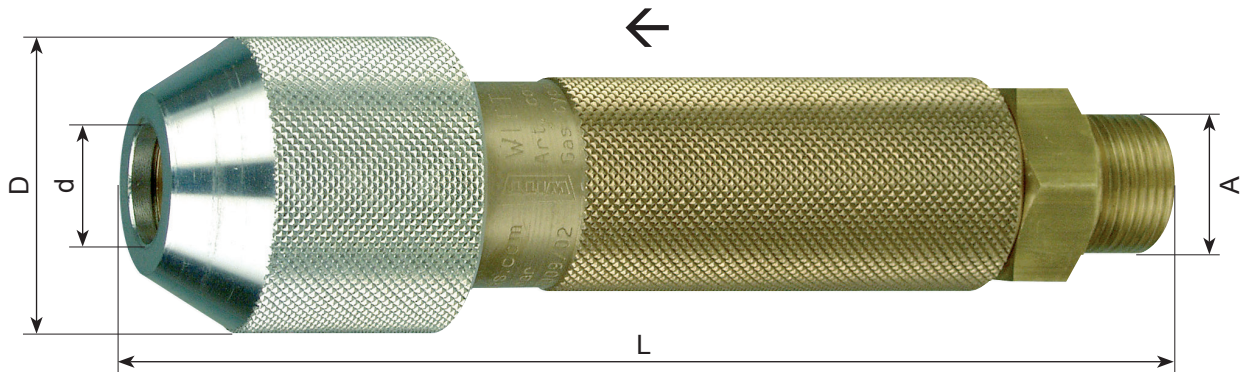

## Lance Holder for oxygen

All material in contact with oxygen is bronze or brass. Seals manufactured from abrasion resistant, self extinguishing rubber. Ensures security if inserted lance by the combination of clamp and rubber sleeve.

### Approvals

EN 9539, EN 560

d Ø Lance [mm] [inch]	Lance tolerance Ø [mm]	A Inlet connection male with cone [EN 560]	D [mm]	L [mm]	Weight [g]	Max. working pressure [bar]	Order-No.	
6	–	4.8 - 6.3	3/4"	40	135	oxygen (O) 25.0	040997000	
8	–	6.4 - 8.3	3/4"	40	135		040997800	
10	1/8"	9.1 - 10.2	3/4"	40	135		040996500	
13	1/4"	12.0 - 13.7	3/4"	40	135		040996200	
17	3/8"	16.0 - 17.2	3/4"	55	205		1,500	040996100
21	1/2"	20.0 - 21.5	3/4"	55	205		1,500	040996300
27	3/4"	26.0 - 27.5	1"	60	215		1,900	040687000
34	1"	32.3 - 34.5	1.1/4"	80	215		–	040997300
42	1.1/4"	42.0 - 43.0	1.1/2"	80	215		–	on request

Other connections available upon request