DOME PRESSURE REGULATOR SET 767 LE/S SMART

Complete solution, own-medium controlled, including smart features

High performance dome-loaded pressure regulator set for inline installation, combined with high-tech sensor technology and electronic components. The dome pressure regulator 767LE/S Smart can signal, for example, pressures, temperatures and an indication of the flow rate. These signals can be used to optimize performance, safety and maintenance regimes.

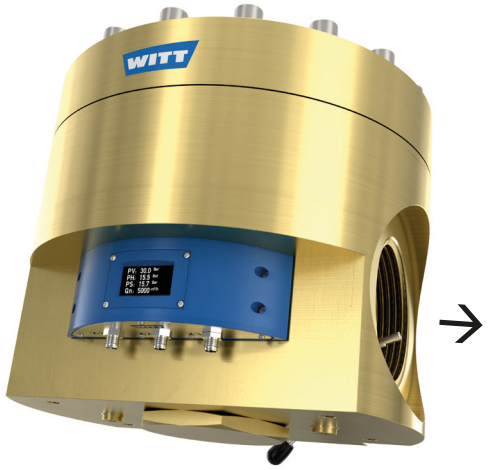

WITT dome pressure regulator technology is unique in the world as it offers maximum pressure constancy even at high and fluctuating flow rates or with small differences between inlet and outlet pressure. Now the dome pressure regulator 767LE/S is also available with smart functions: Important operating parameters can be displayed via 4-20 mA signals, enabling the gas supply to be monitored and optimized. Continuous data logging enables quality control and is an important step towards networked production.

Features of WITT dome pressure regulator technology

The extraordinary pressure constancy of WITT dome pressure regulators is the result of a complex technology consisting of perfectly matched components:

- **Pilot Control Tube (PCT)** one of the features enabling highly accurate control of outlet pressure
- **Balanced Seat Design (BSD)** further enabling control precision, high reliability and low maintenance
- A **complete solution**, ready to use with integrated pilot pressure regulator, completely assembled and tested
- **Own-medium controlled** enabling autonomous operation (no separate gas supply required)
- **Closed system** self-relieving design, but no gas is released to atmosphere

Smart Features

In the smart dome pressure regulator, temperature and pressure values are captured by high-tech sensors and transmitted via 4-20 mA signals. Depending on customer requirements, the following features are available individually or combined:

- Signaling and display of inlet pressure (P1) and outlet pressure (P2) in bar and temperature (T1 and T2) in °C
- Signaling and display of the pilot pressure (P3) in bar
- Indication of the instantaneous gas flow rate (FR) in Nm³/h

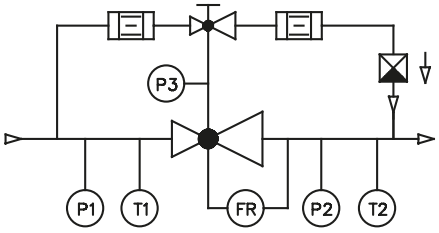

Model variations Smart	Features
"Standard"	Display, indication of inlet pressure and temperature as well as outlet pressure and temperature
"Standard + P3"	"Standard" features, plus indication of pilot pressure
"Standard + Flow"	"Standard" features, plus indication of flow rate
"Standard + P3 + Flow"	"Standard" features, plus indication of pilot pressure and flow rate

Approvals

Company certified according to ISO 9001, ISO 22000 and PED 2014/68/EU Module H
CE-marked according to PED 2014/68/EU
Designed for Oxygen Service in accordance with EIGA 13/20 and CGA G-4.4: Oxygen Pipeline and Piping Systems
Cleaned for Oxygen Service in accordance with EIGA 33/18 and CGA G-4.1: Cleaning of Equipment for Oxygen Service

Optional

Analyzed for Food Safety per HACCP-Analysis
Fulfils the requirements of EU Regulations (EC) 1935/2004, and (EC) 2023/2006
Fulfils the requirements of German Food and Feed (LFGB) Law, and is suitable for contact with food gases

WITT Gas Controls LP, 1055 Windward Ridge Parkway, Suite 170, Alpharetta, Georgia 30005, USA
Tel. +1 770-664-4447, Fax +1 770-664-4448, witt-usa@wittgas.com, www.wittgas.us

DOME PRESSURE REGULATOR SET 767 LE/S SMART

Technical data

	767LE/S Smart		
Max. inlet pressure	CO_2 363 PSI	O_2 435 PSI	other gases 580 PSI
Outlet pressure	7 - 145 PSI		
	7 - 232 PSI	7 - 421 PSI	7 - 435 PSI
Connections	Flange DN 100/PN40 or Flange DN 80/PN40 DIN EN 1092-1 G 3 female 3″ NPT female		
Kv-Value	30		
Cv-Value	35.1		
Coefficient as per DIN EN ISO 7291	Coefficient of increase in pressure after closing R = 0.47 Coefficient of unevenness I = 0.01		
Temperature range	-22 °F to +122 °F		
Housing	Brass		
Cartridge	Stainless steel (1.4305)		
Membrane	CR		
O-Ring	NBR		
Spring	Stainless steel (1.4310)		
Application	Non-flammable gases including O_2 Flammable gases outside Ex Zone		
Power supply	24 V DC		
Protection class	IP 44		
Parameters / Accuracy	Temperature ± 35.6 °F Pressure approx. 1.5% current gas flow - upon request		
Interface	M12, 4-pin plug		
Signals	4 - 20 mA / RS485		
Weight	143 lb		

other materials / material combinations upon request

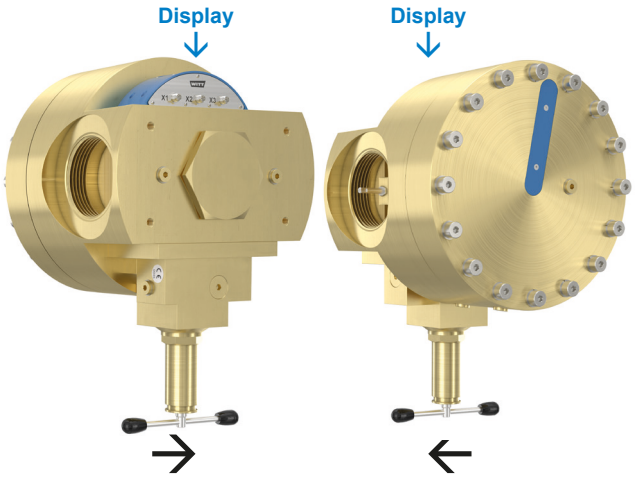

prescribed installation position
at selection of model variation with „Flow“

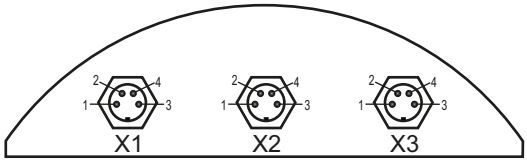

Connections			
X1	1	P1	Inlet pressure
	2	T1	Temperature inlet
	3	GND	–
	4	P3	Pilot pressure (option)
X2	1	V+	+24 V DC
	2	RS485 A	Transmission of results
	3	GND	–
	4	RS485 B	Transmission of results
X3	1	P2	Outlet pressure
	2	T2	Temperature outlet
	3	GND	–
	4	FR	Flow rate

Model	Connection G	Dimensions in inches								
		A	B	C	C_1	H	L	O (O-ring)	S	AF
767	3″ female	9.4	4.9	0.7	–	approx. 8.7	8.4	–	4.8	–
	3″ NPT female	9.4	4.9	0.7	2.1	approx. 8.7	12.6 ($L+2xC_1$)	–	4.8	3.9
	DN 100/PN 40	9.4	4.9	0.7		approx. 8.7	17.5	5.0x0.16	4.8	3.7
	DN 80/PN 40	9.4	4.9	0.7	–	approx. 8.7	16.7	4.5x0.12	4.8	3.7

other connections upon request

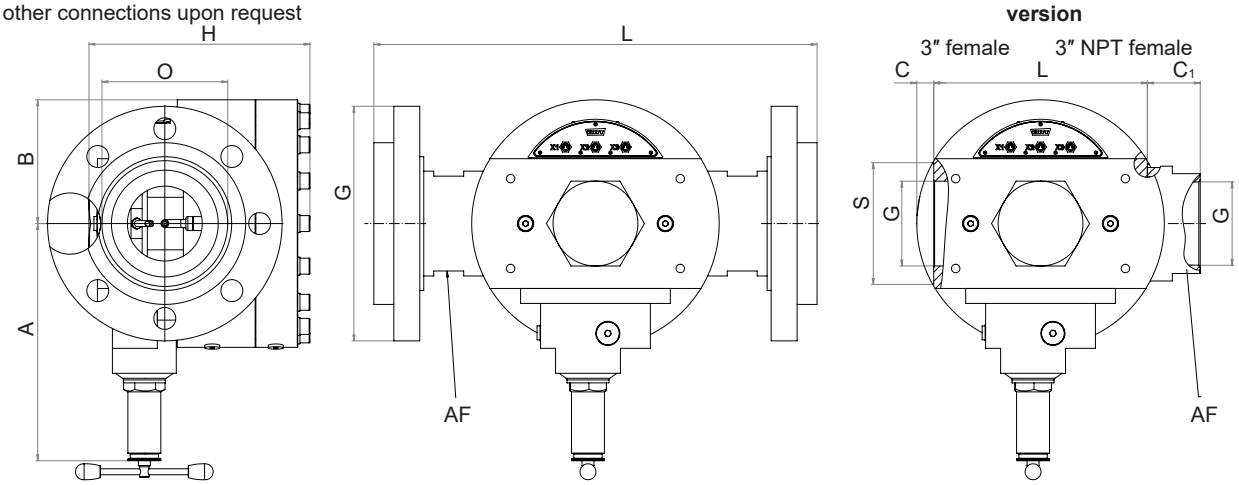

For more pressure regulators visit www.wittgas.us

WITT Gas Controls LP, 1055 Windward Ridge Parkway, Suite 170, Alpharetta, Georgia 30005, USA
Tel. +1 770-664-4447, Fax +1 770-664-4448, witt-usa@wittgas.com, www.wittgas.us

DOME PRESSURE REGULATOR SET 767 LE/S SMART

Pressure control performance

Pressure control performance examples (N_2, 68°F : apply conversion factor of x 0.8 for CO_2)

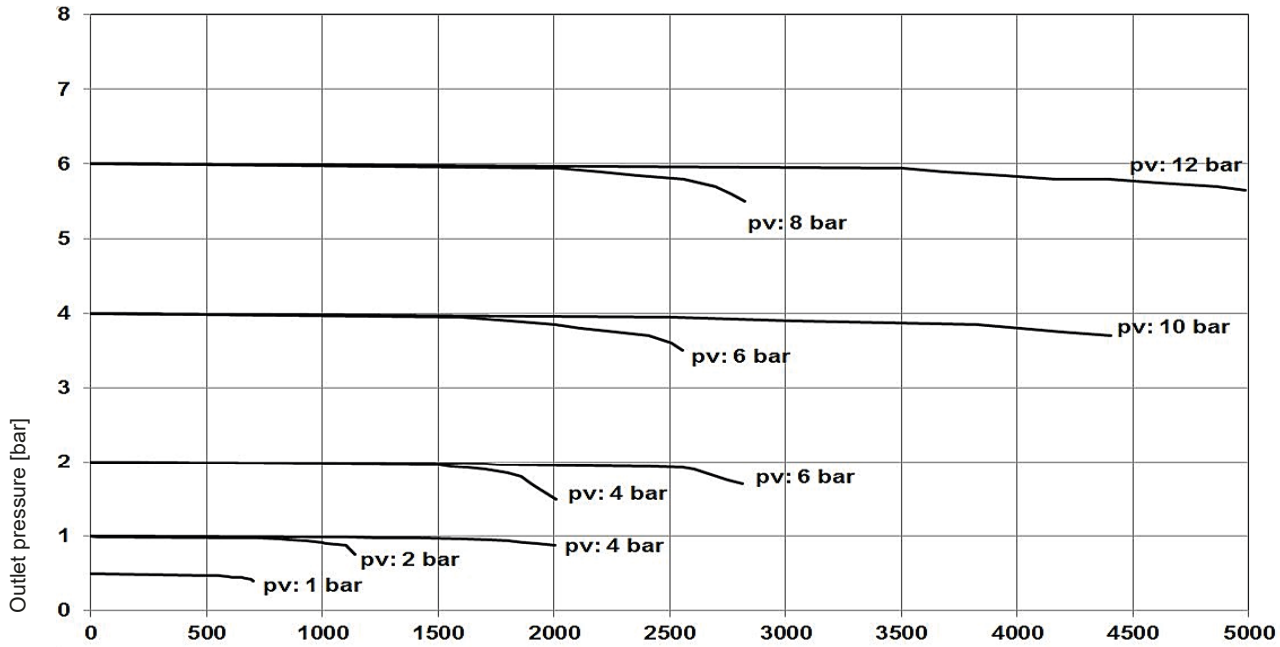

Flow rate [m³/h], Pv = Inlet pressure [bar]
1 m³/h = 35.3 scfh

Flow capacity "envelope"

Inlet pressure = 32 bar_{abs}

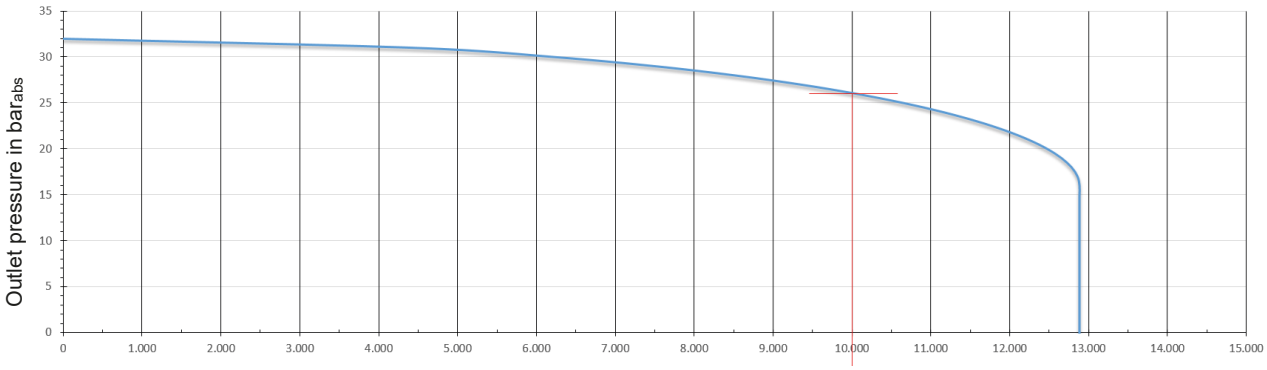

767 LE-S | Max. Flow in Nm³/h at 68°F | Gas: N_2

Example:
Inlet pressure: 32 bar_{abs}
Outlet pressure: 26 bar_{abs}
Max. Flow: 10 000 Nm³/h
Gas: N_2

individual graphs with your parameters upon request

WITT Gas Controls LP, 1055 Windward Ridge Parkway, Suite 170, Alpharetta, Georgia 30005, USA
Tel. +1 770-664-4447, Fax +1 770-664-4448, witt-usa@wittgas.com, www.wittgas.us

DOME PRESSURE REGULATOR SET 767 LE/S SMART

Connections and options

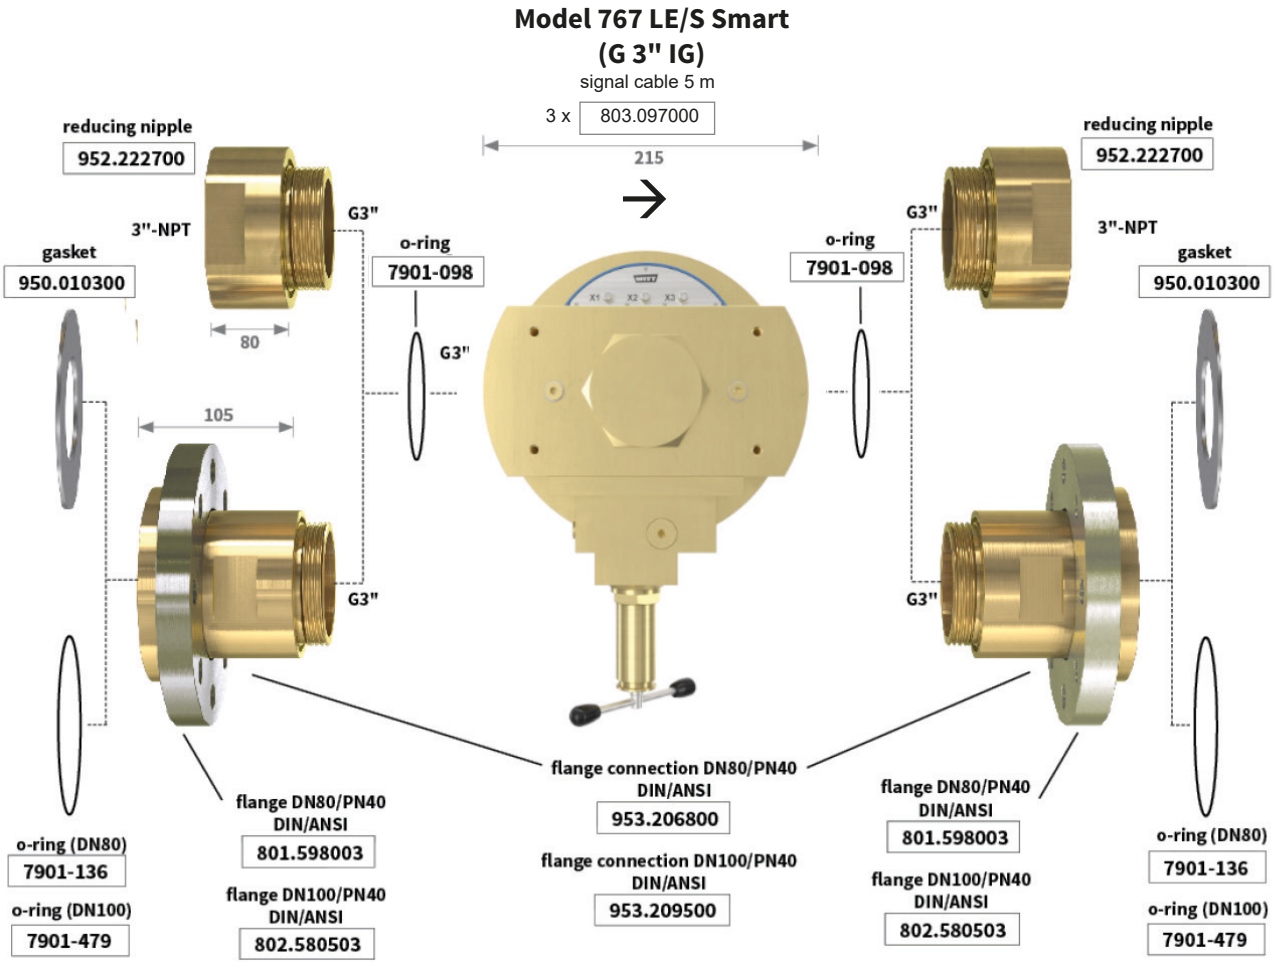

Maintenance Set	
Model	**Order-No.**
767LE/S	962.000061

Lockable spindle cap	
Model	**Order-No.**
767LE/S	966.061400

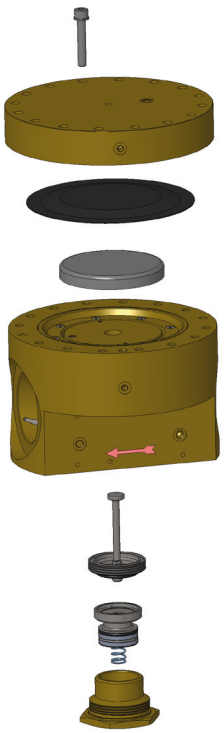

Maintenance

Depending on application, moving wetted parts may need replacement every 1-3 years.

For this we offer our Maintenance Set with original spare parts.

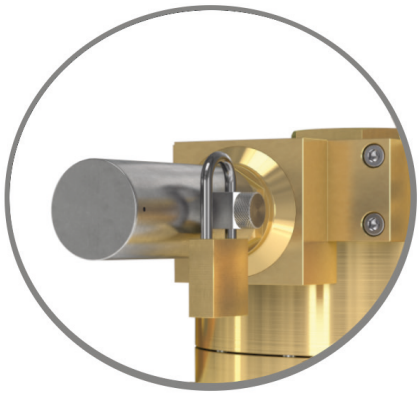

The lockable spindle cap protects the dome pressure regulator from unauthorised or accidental adjustment.

WITT Gas Controls LP, 1055 Windward Ridge Parkway, Suite 170, Alpharetta, Georgia 30005, USA
Tel. +1 770-664-4447, Fax +1 770-664-4448, witt-usa@wittgas.com, www.wittgas.us